
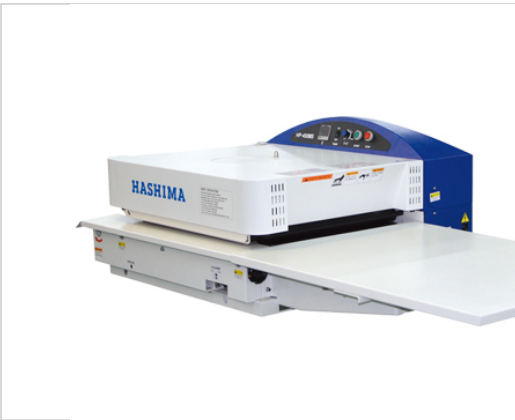


# HP-450M

# HP-450MS



## Specifications

Automatic belt warping prevention device. The Upper belt warping prevention system adopts a direct limit sw the lower belt warping prevention system. Increased the fusing belt width to 450mm. Adopted rubber driving slip driving. MS MODEL has been equipped with a rotary strip-off device as standard.

|                   |                              |
|-------------------|------------------------------|
| Description       | Compact Fusing Press         |
| Model             | HP-450M, MS                  |
| Voltage           | 1P220V                       |
| Rated Output      | Heater: 4kw<br>Motor: 33W    |
| Temperature (MAX) | 195℃                         |
| Pressure (MAX)    | 1.5kg/cm2                    |
| Belt Speed (MAX)  | 8.7m/minutes                 |
| Heating Time      | 5 ~ 20 second                |
| Fusing Width      | 450mm                        |
| Size              | W: 1,660mm D: 880mm H: 490mm |
| Weight            | 152kg                        |

FOLLOW US



# Contact us

By phone

**+81-58-245-4501**

Opening hours/8:45-17:45  
Holiday/Saturday Sunday

By e-mail

**CONTACT FORM**

**PAGE TOP**



HASHIMA in 3min  
Strong point Keyword  
Number Customers  
HASHIMA network

Products information  
Search by the category  
Search by the process  
Download catalog or manual

Company information  
Company policy  
Message from CEO  
Company overview Bases  
History

HASHIMA  
New information  
Contact us

Head office  
3-18 Kimpocho Gifu-shi, Gifu, Japan,  
Postal code: 500-8167

Business office  
7-6 Ryoge Gifu-shi, Gifu, Japan,  
Postal code: 500-8241  
TEL: +81-58-245-4501

This site is protected by reCAPTCHA and is subject to Google's [Privacy Policy](#) and [Terms of Use](#).

Copyright © 2023 HASHIMA All Rights Reserved.

Site map

FOLLOW US

