


Hashima has been sold Needle Detector more than 114 countries.

Hashima's Needle Detector has been sold not only in Japan but also in more than 114 countries around the world, and we have a global network of distributors.
For maintenance and service inquiries, please contact your nearest Hashima or authorized Hashima distributor.

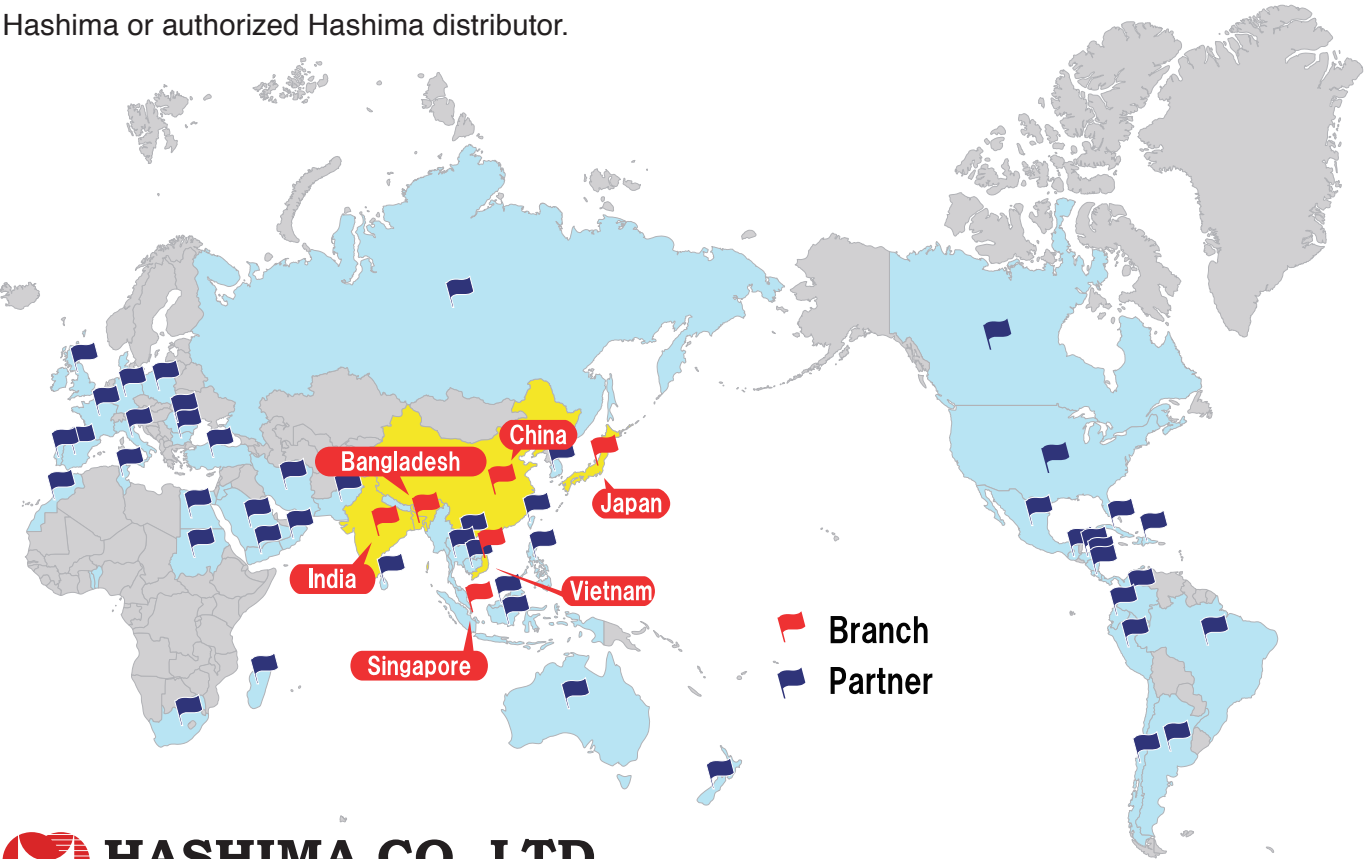

HASHIMA CO.,LTD

- **HEAD OFFICE**
7-6,RYOGE,GIFU-CITY,JAPAN
TEL:81-58-247-8400 / 81-58-245-4501 FAX:81-58-240-5775
- **IBI FACTORY (JAPAN)**
TEL:81-585-22-6678 FAX:81-585-22-6699
- **FACTORY : KUNSHAN (CHINA)**
TEL:0512-57771838 FAX:0512-57771848
- **SINGAPORE OFFICE**
TEL:65-62858131 FAX:65-62858132
- **INDIA OFFICE**
TEL:91-80-4154-0315 FAX:91-80-2559-2002
- **BANGLADESH OFFICE**
TEL:880-2-7913655 FAX:880-2-7913099
- **VIETNAM OFFICE**
TEL:84-226-3555840 FAX:84-226-3555841

Web site

YouTube

Twitter

Instagram

<http://www.hashima.co.jp/>

Agent

HASHIMA GENERAL CATALOG

Inspection Machine Series



The best of Needle Detector in the industry

In production since 1994 and soon to be 30 years old .Over 21,000 single type needle detector produced.Over 4,500 two-head type needle detector produced.Cumulative total of needle detector machines: over 25,500 units
 ※As of April 2022

Conveyor type
 Needle detector
 (single head)

HN-880CS
 HN-790GS

■ 7inch color LCD



Conveyor type
 Needle detector
 (two head)

HN-2880CS
 HN-2790GS

■ 7inch color LCD




CONVEYOR TYPE

Redesigned Hashima noise cancel function

Noise is reduced by mounting the amplifier board inside the sensor head.
 A new noise filter significantly reduces noise from the needle detector itself as well as noise from outside.



Reference Video for Noise Reduction

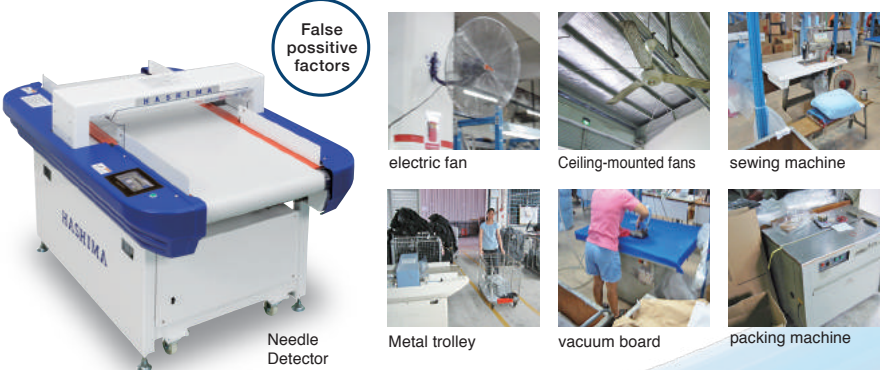

Fastest conveyor speed in the industry

Hashima's Conveyor Needle Detector has high belt rotation speed, so it can be achieved high productivity and improved work efficiency.



Reference Video for conveyor speed

Fe $\phi 0.8\text{mm}$ can be detected with a gate height of 120mm.

120 mm height is standard, and 140, 160, and 180 mm are available as factory options. (Refer to factory options below)

The only one
 in the industry.



Reference Video for Gate Height

SPECIFICATIONS

MODEL	HN-880CS	HN-790GS	HN-2880CS	HN-2790GS
DETECTION METHOD	MAGNET INDUCTION			
DETECTION Bailey	Fe0.8 ϕ sphere or above			
SENSITIVITY ADJUSTMENT	DECIMAL(100steps) orSIZING (6steps)			
DETECTION WIDTH	600mm			
DETECTION HEIGHT	120mm(standard)			
ALARM METHOD	BUZZER POSITION LUMP			
BELT SPEED	40~15m/min.			
POWER SUPPLY	single phase			
RATED OUTPUT	150W			
DIMENSIONS	1598(L)×950(W)×903(H)		2423(L)×1040(W)×903(H)	
NET WEIGHT	230kg		374kg	
PRODUCT GUIDER	Standard		Standard	

※Use non ferrous metal accessories for garments.
 ※Read instruction manual & test machine sensitivity before using.
 ※The specification is under standard test condition.
 ※We Have no responsibility that needle chip, iron chip etc.
 Come out after detecting under non-standard condition.

FACTORY OPTION

MODEL	SNSOR HEIGHT	MAX. SENSITIVITY
HN-880CS	120mm	Fe 0.8 ϕ
	140mm	Fe 1.0 ϕ
	160mm	Fe 1.2 ϕ
	180mm	Fe 1.5 ϕ
HN-790GS	120mm	Fe 0.8 ϕ
HN-2880CS	120mm	Fe 0.8 ϕ
	140mm	Fe 1.0 ϕ
	160mm	Fe 1.2 ϕ
	180mm	Fe 1.5 ϕ
HN-2790GS	120mm	Fe 0.8 ϕ

※Please note that the sensitivity level that can be used may be limited by the surrounding environment and the product to be inspected.

H A S H I M A

Equipped with Detection Position Lamp

Hashima's unique sensor head uses a split detection coil, so when there is a detection, a lamp will indicate the position of the broken needle.




Reference Video for
Detection Position Lamp



Products Guider as standard.

The product guider helps inspection of thick clothing without malfunction.



Equipped with Hashima original conveyor belt

Conveyor belts used in Hashima's needle detector are developed and manufactured in-house.



Supper Fine Mode is equipped as standard.

Hashima's unique sensor head system makes it easier for accessories to pass through by inspecting them in super fine mode. (Conveyor speed moves slowly.)



Reference Video for
Supper Fine Mode

Installation Environment Check function is equipped.

With Installation Environment Check Function, you can find the suitable site for Needle Detector.



Reference Video for
Installation
Environment

Auto PreChecker®

Simplification of daily inspection! Increased work efficiency!

Auto PreChecker®

Auto PreChecker makes sensor checking more accurate and quicker. By using PreCheck Bar (Specialized test block) & system, you do not need to check each coil one by one, the system checks sensors automatically. Also you can keep the PreCheck result if you prepare the optional printer. (※PATENT PENDING, TRADEMARK REGISTRATION PENDING.)



Reference Video for
Auto PreChecker




PreCheck Bar

OPTIONAL
THERMAL
PRINTER




HASHIMA EXCLUSIVE PRINTER
BY CITIZEN



PreCheck Report

Optional accessories for Needle Detector

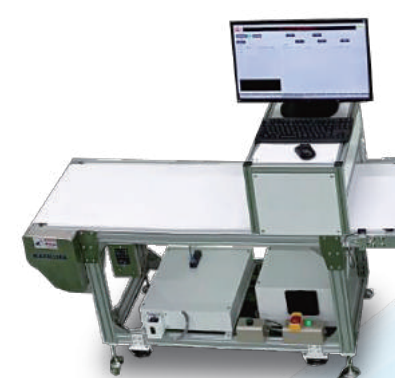

▲RFID Reader



▲RFID Reding
Device for Box



▲HR-5050N



▲Count Monitor



◀Indication Light



Foot Switch ▶

Hashima's Needle Detector inspections are changing!

Needle Detector Precision Inspection Service

A new precision inspection service that provides factory-level inspections at the installation site by authorized Hashima technicians.



Compatible models HN-670, 870, 880C series

Mode select

Precision Inspection

Detection Test

Manual Operation

Calibration screen

DATA

Data can be imported to PC

Hashima Needle Detector Precision Inspection System Introduction Movie

Check out the video


Scan the QR code on the left with a barcode reader on your smartphone or tablet device.

Hashima Needle Detector Precision Inspection System

Lightweight Compact

HN-C1

01 A new automatic inspection system automatically and precisely inspects 125 locations within the detection area. Graphical indication of good/failure.

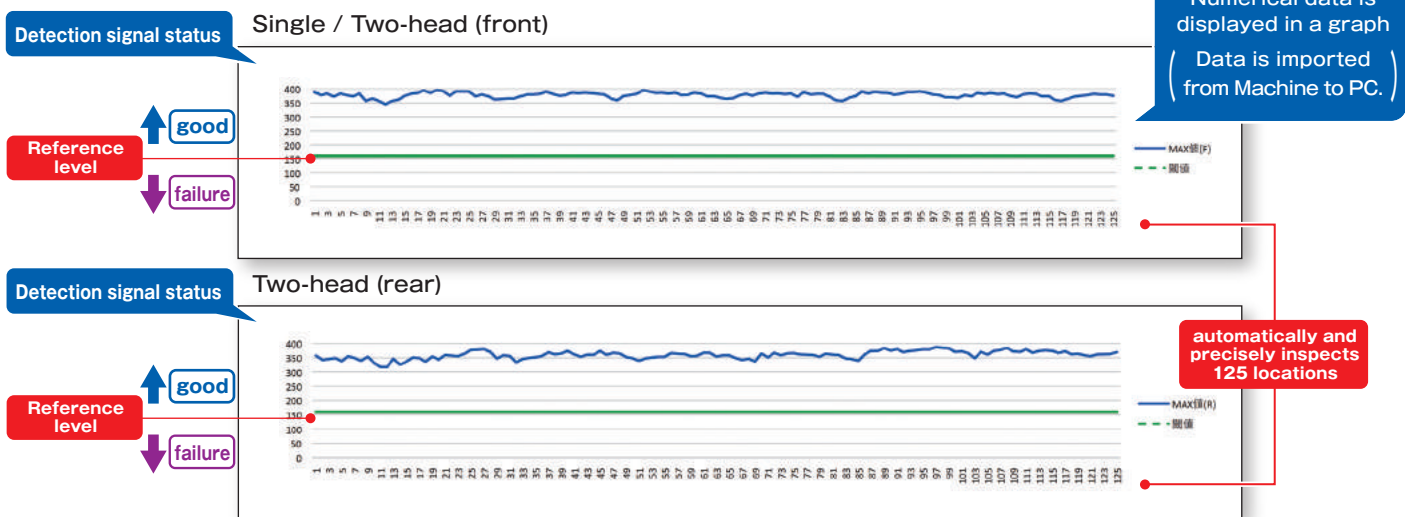

Detection graph of hashima two-head Needle Detector

02 Graphical representation of the installation environment and inspection of operating conditions important for Needle detector.

Advantages

- Confirmation of the machine's installation environment
- Check Needle Detector and operating conditions

Installation environment conditions

Needle Detector operating status

Single / Two-head (front)

Two-head (rear)

Graphing of proper inspection data for installation environment and operating conditions (Data is imported from Machine to PC.)

The appropriateness of the installation environment of Needle Detector can be inspected and confirmed.

03 Electronic data with certificate and report.

Advantages

- Approval with report and inspection results
- Electronic certificate issued

Report-1

Report-2

Hashima confirmed and authenticated

Issued

Needle Detector precision inspection certificate(electronic certificate)

After inspection, a "Report-1-2" will be issued, and if the level is cleared A certificate of precision inspection* is officially issued.

*This precision inspection service is performed by an authorized Hashima technician. If the inspection results do not meet the requirements, certificate will not be issued.

04 The original inspection report is stored on the Hashima Cloud Server and can be accessed at any time and from anywhere. You can check it.

QR code is included on the certificate, allowing easy confirmation of test results.

QR code on the certificate

Secure service for easy confirmation of inspection results

PDF certificates and reports can be downloaded from the Hashima Cloud server from anywhere by reading the QR code, allowing you to share information with your customers.


LARGE SIZE CONVEYOR TYPE NEEDLE DETECTOR
HN-1380C/HN-1580C



PHOTO:HN-1380C



Auto Pre-Checker

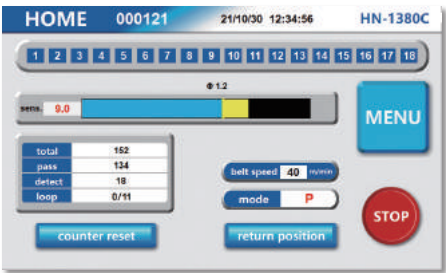

7 Inch Color LCD

The industry's
fastest speed
40m/min

SPECIFICATION

Model	HN-1370C/1570C
Detection Method	Magnetic Induction System
Detection Sensitivity	Fe Φ 1.2mm sphere or Above
Detection Levels	10 stages(100 steps) or Sizing (6 steps)
Detection Width	1300mm/1500mm
Detection height	160mm (150mm: with Guider)
Alarm Method	Buzzer・Position lamp
Belt Speed	15m-40m/min
Power Source	Single Phase
Dimension	1,830 (L) x 1,800(W) x 1,000mm(H)
Weight	495kg
Product Guider	Standard

*Use non ferrous metal accessories for garments.
The specification is under standard test condition.
The sensitivity may vary depending on the tested product and operating environment.
*We are not responsible for any damage caused by chipped iron as a result of operation under non-standard condition

FEATURES

- **New sensor head**
With the new sensor head, the detection unit is not subjected to any vibration from the conveyor, and it operates more stably.
This enables the industry's fastest speed of 40 m/min.
- **Auto pre-checker**
It is equipped with an auto pre-checker which is used for the pre-operation inspection. Inspection time can be greatly reduced.
- **Super fine mode(40~15m/min)**
Belt speed can be changed from 15m/min to 40m/min, allowing smoother passage of various apparel accessories.
- **Environment test mode**
The machine's installation environment can be tested.
- **Two sensitivity options**
10 Stages method (100 steps) and sizing method (6 steps) can be selected
- **7 Inch Color LCD**
" The use of a color LCD has greatly improved operability and visibility.
"The operation status can be seen at a glance

HANGER TYPE NEEDLE DETECTOR
HN-1300H

SPECIFICATIONS

Model	HN-1300H
Detection Ability	Fe φ1.0mm Sphere or above
Detection Width	Height 1,300mm Width 130mm
Detection Speed	600pcs/h
Power Source	1P 220V
Rated Output	100W
Air Pressure	5kg/cm2
Dimension	2,300 (L) x 900 (W) x 2,350 (H) mm
Weight	800kg

*Use non ferrous metal accessories for garments.
*Read instruction manual & test machine sensitivity before using.
*The specification is under standard test condition.
*We have no responsibility that needle chip, iron chip etc. come out after detecting under non-standard condition.



FEATURES

- **Speedy and smooth needle detecting**
It is possible to detect the products with hanger at 6sec/pc
- **Improvement of detecting precision**
φ1.0mm steel is detected by detecting width 130mm
Detecting precision is improved by adopting newly developed detecting sensor. detecting length is 130cm. so long size products (suit, coat, pants, etc.) can be detected.
- **Improvement of performance for an outside noise**
New detecting sensor unit has also good noise performance. when new type is compared with previous type, 30% reduced influence by an outside noise.
- **New sensitivity level monitor**
A level monitor adopts new design and is easier to check the sensitivity level. detecting position lamp is divided to 20 pieces so that it is also possible to show foreign object exactly. detecting position exactly.
- **Auto assortment**
This needle detector can assort goods products or not automatically on the processing bringing-----set out-----detecting-----assorting, the operator can do needle detecting efficiently without stop the system.
- **Data collection**
The detecting result is able to be collected to your computer (windows XP) by optional software from the needle detector. the collected data can be used for each purpose.

TABLE TOP TYPE NEEDLE DETECTOR
HN-450N



FEATURES

- As indicator on control panel is indicates the position of broken needles, it is easy to find broken needles.
- As detecting adjustment can be changed by 6 steps, it is easy to adjust in accordance with the sizes and kinds of accessories.

ATTENTION

- Table top needle detector is designed to detect magnetic metal objects in ladies, children's and men's clothes.

OPTION

- **Table for HN-450N**
HN-450N can be built in the optional table. The surface of the table and the needle detector are same height using this table. This table is helpful for detecting work.

Control panel



Sensitivity adjustment SW

SPECIFICATIONS

Model	HN-450N
Detection Method	Magnetic induction
Detection Sensitivity	MAX 110mm height by steel needle (φ0.6×L33)
Detection Levels	6 Levels
Alarm Method	Buzzer
Detection Width	80mm×450mm
Power Source	Single phase
Rated Output	(appr.) 10W
Dimension	590 (L) × 400 (W) × 82 (H) mm
Weight	(appr.) 9kg

*Use non ferrous metal accessories for garments.
*Read instruction manual & test machine sensitivity before using.
*The specification is under standard test condition.
*We have no responsibility that needle chip, iron chip etc. come out after detecting under non-standard condition.

HANDY TYPE NEEDLE DETECTOR
HN-30S/35W

- Updated detection function
- Notice by light and buzzer
- Always keep clean by antimicrobial processing



Features

- **φ0.8 mm steel ball is detected**
This new handy type needle detector can detect φ0.8mm steel ball and is good for a steel pin
- **Easy to use with clean**
New design and Antimicrobial processing, using long time with no stress
- **Detecting wider area (HN-35W)**
Unit surface is wider and easy to detect by Spot/Wider sensitivity select switch
- **Sensitivity select switch(HN-30S)**
The new handy type needle detector adopts Hi/Low sensitivity select switch
- **Battery save function**
Under stand by, the battery mode is changed to save mode automatically, which saves battery consumption. When take it in hand, the machine starts automatically. New designed detecting circuit cuts electric power consumption.
- **Large size LED lamp and buzzer.**
It's easy to check the detecting result by adapting large size LED lamp and buzzer.



HN-35W
(Wide type)

Antimicrobial

Based on the results evaluated by ISO22196 method, SIAA is displayed on products with quality control and information disclosure according to Antimicrobial Product Technology Council guidelines.

Model	HN-30S	HN-35W
Detection Method	Magnetic induction	Magnetic induction
Detection Ability	Hi: φ 0.8mm Sphere Low: φ 1.0mm Sphere	φ 0.8mm Sphere
Detection Area		Spot / Wide
Alarm Method	Buzzer, LED lamp	Buzzer, LED lamp
Detecting Area	25mm(W) × 50mm(L)	48mm(W) × 93mm(L)
Power Supply	1.5V dry cell battery × 2(AA)	1.5V dry cell battery × 2(AA)
Dimension	58(W) × 195(L) × 50(H)mm	56(W) × 245(L) × 67(H)mm
Weight	210g	300g

*Use non ferrous metal accessories for garments.
*The specification is under standard test condition. We have no responsibility for needle chip, iron chip etc. Come out after detection under non-standard condition.




X-ray inspection AI support system AIXDETECTOR

(INTERNATIONAL PATENT PENDING)

What is HASHIMA AIX-DETECTOR

AIXDETECTOR

It is a support software that assists in the visual inspection of foreign objects, consisting of judgment result display software and learning software for more accurate and efficient inspection by installing AI in X-ray inspection. When displaying product images taken by an X-ray inspection system on a monitor, the system can detect foreign objects and display their locations on the monitor using a heat map.

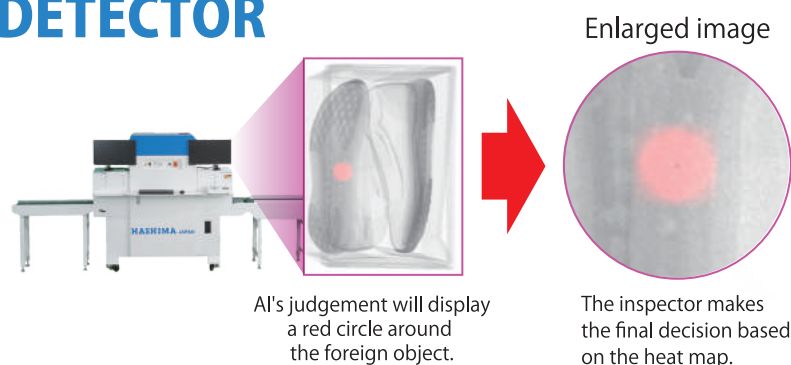


AI will make X-ray inspection evolving more and more.

— The more you use it, the more it evolves. —

AIXDETECTOR

AI that learns every day

Through repeated night time learning, AI will eventually become like experienced and skilled operators

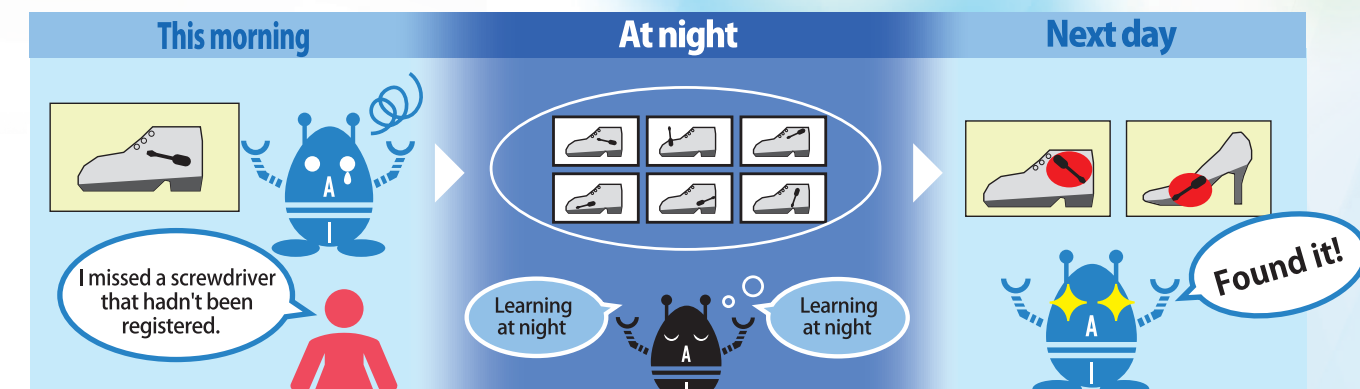

By registering foreign objects that have been overlooked, AI will learn them at night, and similar objects can be found in the future. Given its foreign matter registration nature, it can be applied to different products

AIXDETECTOR

Advantages of AIX-Detector



Improved inspection accuracy and speed

It takes only 0.2 seconds to detect a foreign object of 0.8 mm in size. With the support of AI, the operator can find foreign objects quickly and reliably.



Improved inspection quality variation.

Visual inspection by an operator can be inconsistent and erroneous. The judgment results may vary. With the help of AI, the inspection is always performed with the same standard.



Reference Video for
X-ray inspection machine




Reduce human resource development costs

In the past, inspection quality (variation/speed) was dependent on the operator's experience, however with the support of AI, high inspection quality can be maintained regardless of the operator's experience. This means that "visual inspection work" will be leveled out with the introduction of AI and anyone can do in a short time. There will be no need to spend time and money on training operators.



Maintain high inspection quality and easy transfer to other factories

By installing a highly experienced AI into a newly established factory, it is possible to achieve the same testing quality as the existing factories and Inspection guidance by skilled operators can be kept to a minimum.

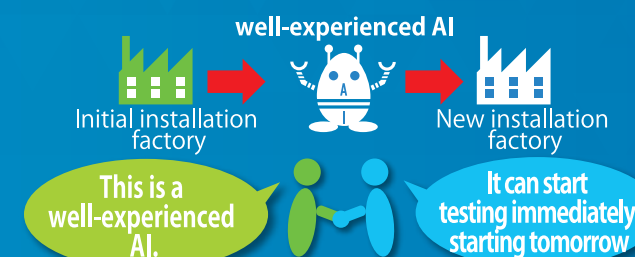

X-Ray

X Ray Inspection system
INSPECTION MACHINE

FUNCTION

■High Precision Sensor

Maximum Sensitivity in the industry by new line sensor. This mode is equipped with high precision X ray line sensor and realizes low noise and speed up.

■Double Direction Shooting (Dual Sensor)

Double Direction Shooting (0 degree and 25 degree) can provide 2 different angle image data by one operation. It is quite useful to detect foreign object.

■Traceability

All scan image data can be saved and can print out the scan image dates No. and also can print out the scan image date itself and transfer it at a distance through internet.

■Multi-Language Support

We suppose that the machine will be operated overseas, so that it supports Japanese, English and Chinese.

■Full Automatic Operation

X ray irradiating, Conveyor Start, Image capture and saving are controlled by one operation automatically.

■Variety of Monitor setting

It is possible to select variety of setting (one image with one direction, one image with 2 direction) for detecting object.

■Energy Saving

This model checks the operation condition and controls the power consumption automatically.

●Label Printer
It is useful for Traceability.

●Rear Conveyor
Length: 1m

●Monitor Arm
The monitor position changing is possible.

Control Panel

●Remote Control Switch
Easy operation by dedicated remote controller

●Automatic Loading Conveyor
Length : 1m.
Height : 850mm.




HNS-S410NDS

SMALL SIZE

For small object to shoes (knee-high boots) and process inspection



■ HNX-S410N/HNX-S410NDS
Installation dimension

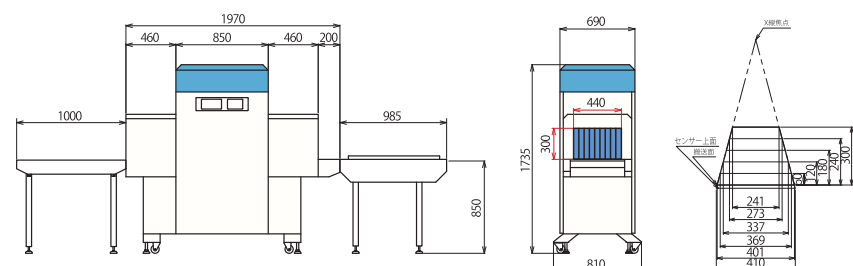


HNX-S665NDS

MEDIUM SIZE

For small object to garments



■ HNX-S665N/HNX-S665NDS
Installation dimension

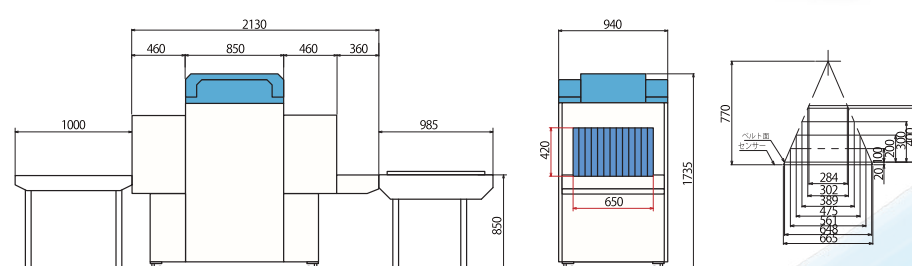


HNX-S800NDS

LARGE SIZE

The sensor size is 819mm width.
For large size garment.



■ HNX-S800N/HNX-S800NDS
Installation dimension

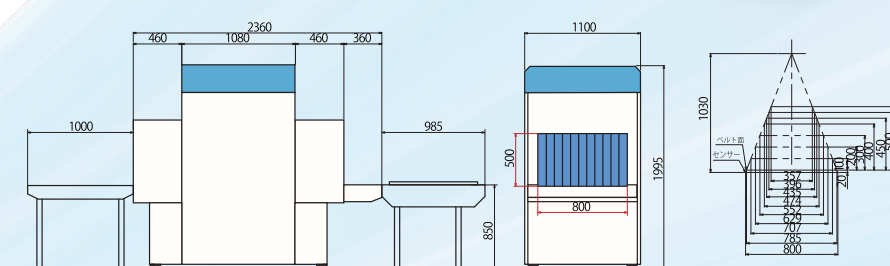


FUNCTION

Main Screen

Renewal of Software
Iconizing required functions to mark them intuitive. The new software copes with both advanced settings and simple operations so that old version user also can use the new software.


Image adjustment
An operator can call a number of conditions by pressing iconized adjustment button. This function will help to fine out foreign object that difficult to find out.

Counter
Since each scan date has running No. and the operator can check the before and after scan data easily by this counter function.

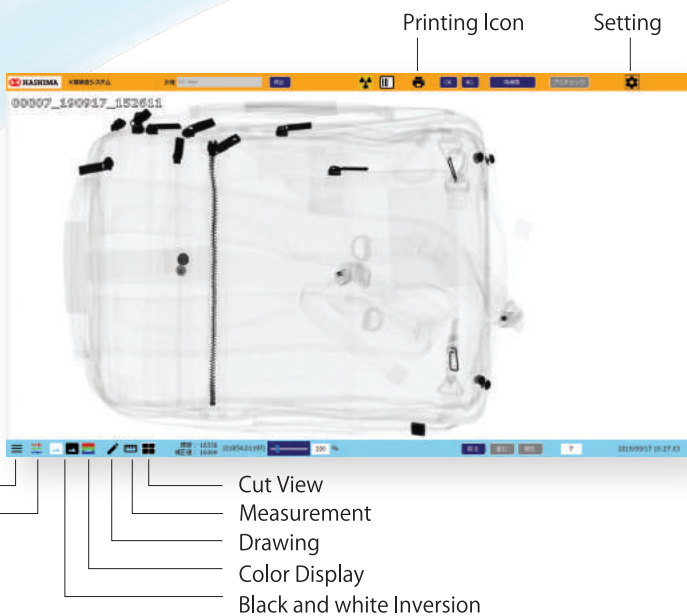

Full color Display

It is helpful to find our foreign object by full color display

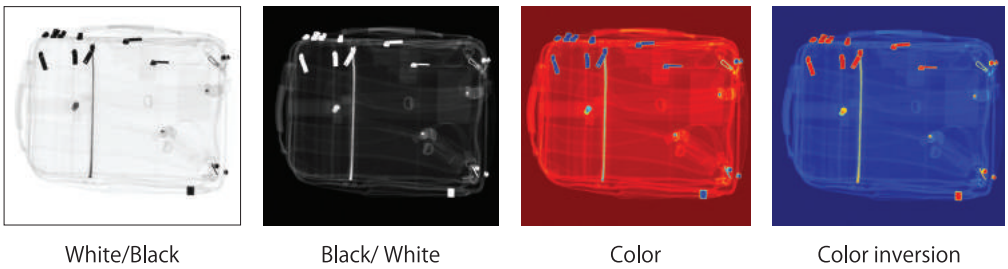


Drwaing Function

An operator can put comment to the scan data directly.



Report Creation Function


It is easy to create each report based on Customer name, Lot No. , Size, Color.

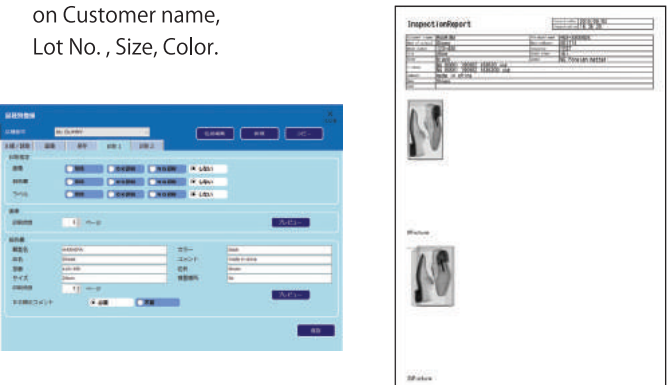

SPECIFICATIONS

Model	HNX-S410N	HNX-S410NDS	HNX-S665N	HNX-S665NDS	HNX-S800N	HNX-S800NDS
X-ray Angle	0° 25° (Dual Direction)					
Tunnel Size	400 (W) × 300 (H) mm		690 (W) × 420 (H) mm		850 (W) × 500 (H) mm	
Belt Width	460mm		648mm		785mm	
Belt Speed	Adjustable Belt Speed 15~25m/min					
Conveyor Stly	Double Conveyor	Single Conveyor	Double Conveyor	Single Conveyor	Double Conveyor	Single Conveyor
Object Weight	Max 5kg					
X-ray Sensor	Straight Type Line Sensor					
Sensor Length	409.6mm		665.6mm		819.2mm	
Sensor Pixel Size	0.4mm					
Sensor Pixel Number	1,024pixels		1,664pixels		2,048pixels	
X-ray Tube Voltage	30~75kV					
X-ray Tube Current	0~3mA					
Operating System	Windows10 (64bit)					
Memory	8GB					
Hard Disk	2TB					
Image Processing	Brightness, Contrast, Sharpness, Zoom					
Data Saving	Automatic or Manual Saving					
Data Format	TIFF/BMP/JPEG (Plurally Selectable)					
Display	23.8inch Full Definitions×2 (Standard)					
Image Data Print	Automatic or Manual Printing					
Safety Sensor	Hand Insertion Sensor					
Dimensions	1970 (W) × 810 (D) × 1735 (H) mm		2130 (W) × 940 (D) × 1735 (H) mm		2360 (W) × 1100 (D) × 1995 (H) mm	
Weight	700kg		800kg		900kg	
Power Supply	AC90~120V 50/60Hz					
Power Consumption	0.8KVA					
X-ray Leakage	1 μSV/h以下					
Operating Temperature	5~35℃					
Operating Humidity	20~80%RH (With Non Condensation)					
Standard Accessories	Instruction Manual, Test Piece					
Optional Accessories	Touch Panel, PC Printer (Selectable) Label Printer, Roller Conveyor, Electric Conveyor (Put/Carry Out) , Monitor Stand, Putting Guide, UPS					

OPTION



Barcode Reader System
Automatically read the barcode on the side of the boxed product. The imager system uses a CMOS sensor for fast reading speed and reliable reading of barcodes on moving products.

Spot Sensor System

Conventionally, the presence or absence of products on the conveyor was checked by using photoelectric sensors, which blocked the light from the passing products. In this method, the package itself sometimes allows light to pass through, causing the machine to malfunction. By using a spot sensory system, it will reliably recongnize even the packaged products.



OPTION



Color printer (RICOHSG2200)
Print out the image scan data Support Windows 64 bit



UPS Uninterruptible Power Source (UPS)
In case of electrical outage, protecting the machine



Label Printer
Print label to trace the products (Recommend the above model)



Remote Control Switch
Frequent operation is controlled by the button without using the mouse and the touch panel.



Auto Conveyor
Any size ones are available



Roller Conveyor
Any size ones are available